Shower Mixer Set
User Manual

Before Installation:

Please read the instructions and check package list carefully before installing the product.

Package List:

WARNING:
Choking hazard.
Please keep all small parts and plastic bags out of the reach of children.

Package include:

1x Shower set main body
1x 90° shower rod
1x 26.7" shower rod
1x Hand Shower
1x Overhead Shower Head
1x 59" flexible Hose
2x Caps
2x SUS connector
1x Wall fixator
1x Auxiliary shower head
1x Installation fitting accessory bag
1x Shower bracket
1x Spring shape hose
1x User manual

Instruction Steps:

1. Install the shower set main body

a) Determine the position of the shower set main body,the valve should be connected with hot and cold water pipe,if only connect one, there is no water comes out.
Firstly install the SUS connectors to the wall and connect it with hot and cold water pipe outlets

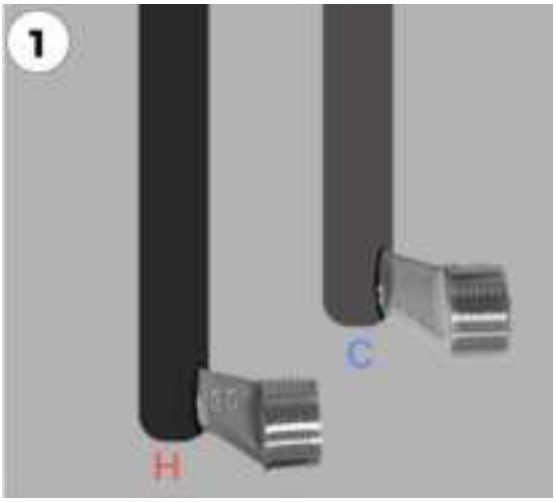

b) Screw in the caps to the connectors

c) Put the black rubber washers into the rotary knob of the main body

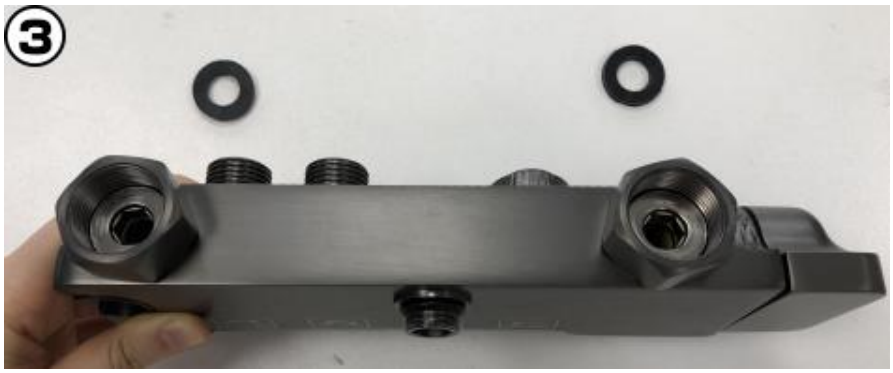

d) Screw in and connect the shower set main body to the SUS connectors

2.Install the shower rod

a) Install the shower rod to the shower set main body

b) Insert the hand shower bracket to the straight shower rod,you can adujst the height of the bracket by pressing the button on the bracket and adjust the angle by rotating it (pls notice the direction of the bracket)

c) Connect the 90° shower rod with the straight shower rod

3.Install the wall fixator

a) Firstly separate the wall fixator and unscrew the screw inside

b)Align the position of the fixator at the joint of the rod, first put part 1 of the fixator at the joint,then insert part 2 of the fixator into part 1. Last install the screw and tightened it

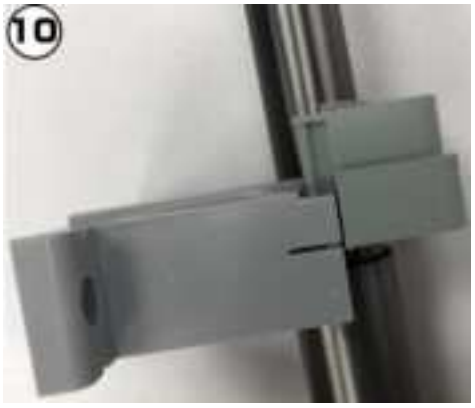

c)Fixing the fixator to the wall by screws,and install the cover of the fixator

4.Install the overhead shower head

5. Install the hand shower,put the rubber washers in it firstly

6. **Install the auxiliary shower head**

7. **Finish the installation**

How to Use

1. **Select the water way,there are 4 water ways can be chosen**

2. **Adjust the temperature of water**

3. **Select the water way of the hand shower by rotating the small knob**

Warning Tips:

1. Each connection part must be securely connected
2. All of the joints must be installed with rubber washers
3. After installation, please make a test to check whether the connectors are leaking or installed incorrectly

Cleaning and Maintenance:

❖ How to clean the shower head

1. Simply wipe the nozzle with your finger or toothbrush to loosen any deposits, then run hot water for a few minutes

2. Place the showerhead in a pot. Consider using a smaller container that just fits the shower head You can also use a small bucket or plastic bin.

Fill the pot with enough white vinegar to cover the shower head. The acid in the vinegar helps dissolve the white mineral deposits on the showerhead.

Let the showerhead soak in the vinegar for 30 minutes. The dirtier the showerhead, the longer you must leave it in the vinegar.

❖ Maintenance of chrome and brushed nickel finished products

1. To clean the product, all you need is a good quality microfiber cloth.

2. Apply a good quality chrome cleaner to a clean cotton cloth and wipe down the chrome. Leave according to product instructions and then rinse well with warm water. Use a dry chamois or paper towel to gently remove any product residue.

3. How to clean chrome: Homemade solutions

In addition to professional products, try this shortcut to achieve cleaning chrome: detergent and warm water! Immerse the chrome-plated object in a sink filled with warm water. Add half a cup of good quality detergent and wipe gently with a soft cotton cloth to avoid scratching the chrome to complete the cleaning.

❖ If you are experiencing a leak, it may have been installed improperly. The solution is as below:

a. If the hose is leaking, put black washers in the ends of the hose to prevent leaks.

b. If the shower arm is leaking, it may be due to a short thread on the shower arm. Place a spare washer over the mesh washer on the bracket nut to prevent leaks.

c. If the bracket is leaking, it could possible be due to the white plastic open O-ring of the bracket became loose during the long-term transit. You will need to reinstall the bracket.

Warranty and Support

We provide 1 year warranty, 30 days free return and refund for our products from the date of purchase.

- **What's covered?**

Defects due to faulty materials and workmanship of the product.

- **What's NOT covered?**

1. Damage caused by the owner when attempting to fix or alter the product by himself or herself.
2. Damage caused by misuse, abuse, neglect, alterations or unauthorized repair.
3. Natural depreciation.

- **How to request warranty services?**

The warranty comes to effect from the date of your purchase, we have records on our system. We don't provide warranty card for environmental purpose.

If any questions,please kindly find customer service. Our customer service will address your issue in 24 hours.